




K TYPE INTRODUCTION

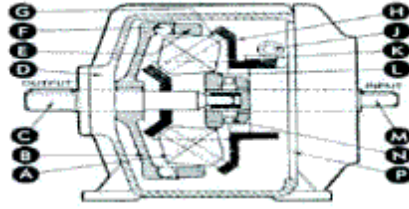

INPU SPEED 1500 R.P.M	MB=OUTPUT TORQUE IN CMkg	nB=OUTPUT SPEED	CONSTANT INPUT H. P.
----------------------------------	-------------------------------------	----------------------------	---------------------------------

H.P.	SIZE	K.1.0	K-2.5	K-6	K-16	K-30
0.5	nB	200-2200				
	MB	160				
0.75	nB	265-2200				
	MB	180				
1.0	nB	325-2200				
	MB	200				
1.25	nB	380-1820				
	MB	210				
1.5	nB		212-2560			
	MB		365			
2.0	nB		270-2500			
	MB		415			
2.5	nB		320-2500	220-2650		
	MB		460	720		
3.0	nB		385-2345	230-2650		
	MB		512	810		
4.0	nB		500-2000	270-2560		
	MB		515	250		
5.0	nB			300-2560		
	MB			1050		
7.5	nB			400-2100	240-2650	
	MB			2100	1870	
10.0	nB				280-2650	
	MB				2150	
12.0	nB				310-2650	290-2600
	MB				2400	2660
15	nB				360-2350	320-2600
	MB				2650	2750
20	nB				440-1800	375-2600
	MB				2940	3150
25	nB					440-2480
	MB					3500
30	nB					500-2000
	MB					3800

HP CAPACITY FOR TRANSMITTING CONSTANT TORQUE INPUT SPEED 1400-1500 R.P.M

SIZE		SPEED RANGE R								
		4	5	6	7	8	9	10	12	
K-30	MB	1210	1210	1000	830	700	-	-	-	
	nB	400-1600	320-1600	320-1920	300-2100	300-2400	-	-	-	
	NA	30	30	30	27	26	-	-	-	
K-16	MB	930	930	670	670	580	480	370	320	
	nB	375-1500	300-1500	300-1800	256-1800	250-2000	240-2200	240-2400	220-2650	
	NA	22	22	19	19	18	16	14	12	
K-6	MB	380	380	285	255	200	200	140	120	
	nB	375-1500	300-1500	300-1800	285-2000	275-2200	240-2200	250-2500	220-2650	
	NA	9	9	8	8	7	7	5.5	5	
K-2.5	MB	170	160	142	126	100	100	7.3	62	
	nB	375-1500	320-1600	300-1800	285-2000	275-2200	240-2200	240-2400	212-2560	
	NA	4	4	4	4	3.5	3.5	2.75	2.5	
K-1.0	MB	60	60	60	40	40	40	29	2.9	
	nB	375-1500	300-1500	250-1500	278-1950	242-1950	217-1950	220-2200	185-2220	
	NA	1.40	1.40	1.40	1.20	1.20	1.20	1.0	1.0	

11, VASTA HOUSE, GR. FLOOR, JANMABOOMI MARG,

FORT, MUMBAI-400001, INDIA.

TEL: 91-22-22844307/22871995/22872449

FAX: 91-22-22873597/22870770

E-mail: info@wiperdrive.com, WEB SITE: www.wiperdrive.com