





LUMBER CONVEYOR CHAIN ATTACHMENT

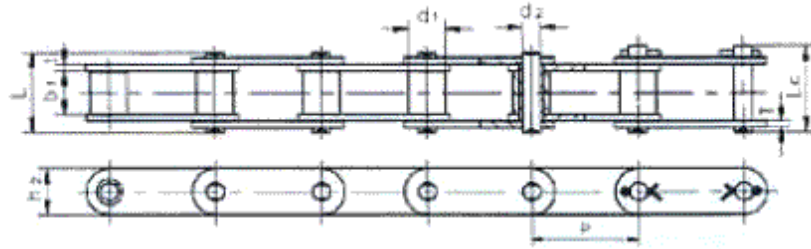

Chain No	Pitch	Roller dia	Width bet inner plates	Pin dia	Pin Length		Inner plate depth	Plate thick	Ultimate tensile strength	Average tensile strength	Weight per meter
					d2 max	Lc max					
81X	P	di max	bi min	d2 max	Lc max	Lc max	h2 max	t/T max	Q min	QC	q
	mm	mm	mm	mm	mm	mm	mm	mm	kn	kN	kg/m
81XH	66.27	23.00	27.00	11.10	49.00	53.50	28.50	4.00	106.7	128.9	3.78
81XHH	66.27	23.00	27.78	11.10	60.70	65.10	31.35	7.94/5.55	151.9	175.7	5.88
81XHS	66.27	23.00	27.78	11.10	65.60	70.00	31.35	7.94	191.1	212.6	6.70
		23.00	27.00	11.10	63.60	68.00	31.80	7.60	152.0	177.2	6.55

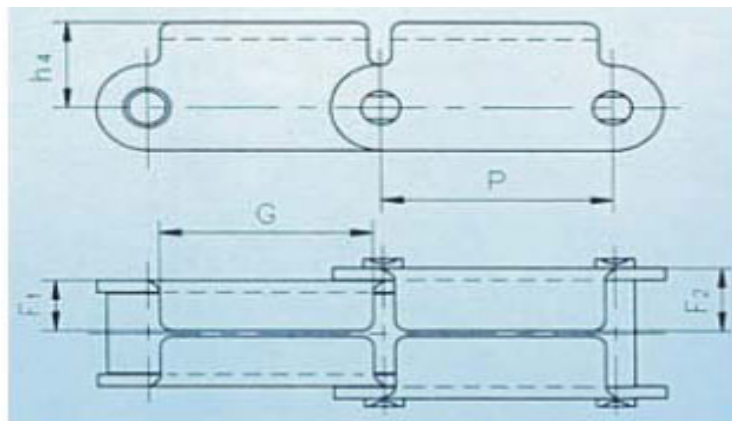

Chain No.	p	f1	F2	G	h4
	MM	mm	mm	mm	mm
81 X F1	66.27	17.50	21.80	58.00	23.85

11, VASTA HOUSE, GR. FLOOR, JANMABOOMI MARG,
FORT, MUMBAI - 400001, INDIA.

TEL: 91-22-22844307/22871995/22872449

FAX: 91-22-22873597/22870770

E-mail: info@wiperdrive.com, WEB SITE: www.wiperdrive.com