




## NFS TYPE CLUTHES

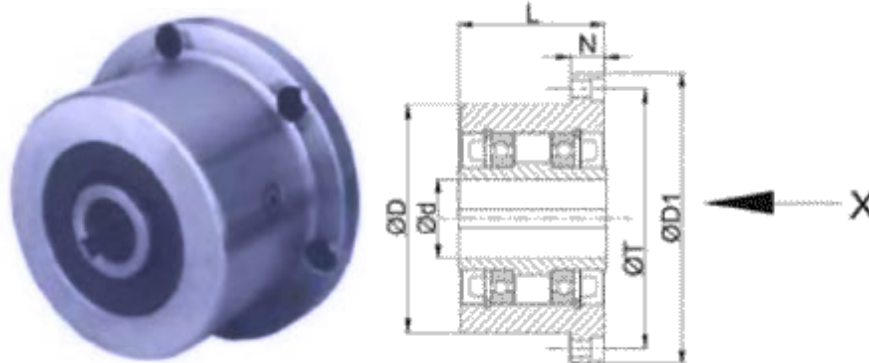

-OIL /GREASED FILLED,READY TO FIT.

-TRANSMIT TORQUE (POWER) in one directions, opposite free.

-Contains individually spring loaded rollers ,ball bearing support.

Function:-Feeding.

-Indexing

-Back stopping

-Overrunning

CODENO.	DH7		D	D1	T	N	L	Z x DIA	TORQUE NM
	OVER	UPTO							
NFS 20	15	20	75	98	85	11	55	4x5.5	270
NFS 25	20	25	90	118	104	12	60	4x6.8	380
NFS 30	25	30	100	128	114	12	65	6x6.8	680
NFS 35	30	35	110	138	124	13	75	6x6.8	1120
NFS 40	35	42	125	158	140	15	85	6x9.0	2050
NFS 45	40	45	130	162	146	16	90	8x9.0	2430
NFS 50	45	50	150	182	162	16	95	8x9.0	2950
NFS 55	50	55	160	202	180	18	100	8x11	3440
NFS 60	55	60	170	212	192	18	115	8x11	4590
NFS 70	60	70	190	232	212	18	130	10x11	5870
NFS 80	70	80	210	252	232	20	145	10x11	8150

All dimensions are in m.m

Other sizes on request.

Dimensions/Design subject to modifications.

Can be supplied with mounting flange

Shaft dia is to be controlled within h6/j6.

11,VASTA HOUSE,GR.FLOOR,JANMABOOMI MARG,  
FORT ,MUMBAI -400001 ,INDIA.

TEL:91-22-22844307/22871995/22872449

FAX:91-22-22873597/22870770

E-mail:[info@wiperdrive.com](mailto:info@wiperdrive.com),WEB SITE:[www.wiperdrive.com](http://www.wiperdrive.com)