




Flat Top Chain for Conveyor is widely used on bottling products line for beer and dring ,and similar light articles transmission such as tank ,bottle,glass vessel.

## STEEL STRAIGHT RUN FLAT-TOP CHAIN

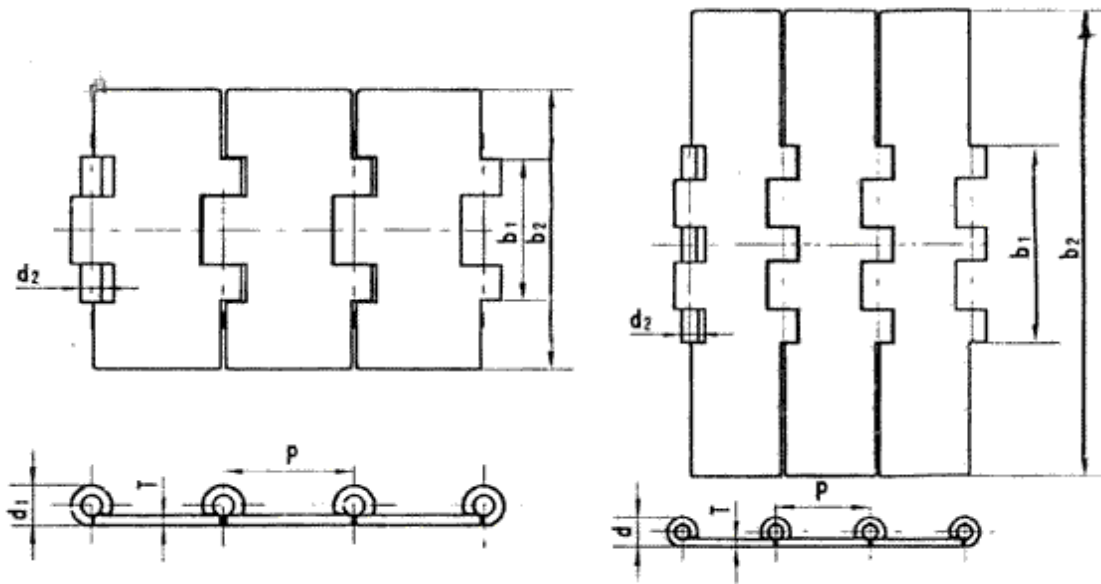

ISO Chain no	Pitch P mm	Slat width b: mm	Width over fixed curls b1 mm	pin dia d: mm	Slat thickness T d1(max) mm	Curl outside dia d1(max) mm	Breaking load		Max Working load		Weight Per Meter q kg/m
							ICr18Ni9T1 (min) kn	ICr13 2Cr13 (min) kn	ICr18NrT1 (max) Kn	ICr13 2Cr13 (max) kn	
<b>Standard series</b>											
Single hinge	C12S	38.1	76.2	42	6.35	13.13	8.00	6.25	3.2	2.5	2.39
	C13S		82.6(82)								2.55
	C14S		88.9								2.70
	C16S		101.6								2.99
	C18S		114.3								3.29
	C20S		127.0								3.59
	C24S		152.4								4.17
	C30S		190.5								5.60
Double hinge	C30D		190.5	80.5	6.35	13.13	16.00	12.50	6.4	5	5.87
<b>Derived series</b>											
Single hinge	25.4-CS54	25.4	54.5	42	6.35	13.13	31	6.25	3.2	2.5	8.00
	25.4-CS63		63.0								
	25.4-CS71		71.5								
	25.4-CS75		75.0								
	25.4-CS82		82.0								
	25.4-CS88		88.0								
	25.4-CS98		98.0								
	36-CS80		80.0								
	36-CS90		90.0								
	38.1-CS53		53.0								
	38.1-CS65		65.0								

11, VASTA HOUSE, GR. FLOOR, JANMABOOMI MARG,

FORT, MUMBAI - 400001, INDIA.

TEL: 91-22-22844307/22871995/22872449

FAX: 91-22-22873597/22870770

E-mail: [info@wiperdrive.com](mailto:info@wiperdrive.com), WEB SITE: [www.wiperdrive.com](http://www.wiperdrive.com)