




TIMING PULLEY

Timing Pulleys:

These pulleys have evenly spaced axial grooves cut in their periphery to make correct positive engagement with making teeth of the belt .The pulleys are made in all stock pitches to confirm with stock pitches with belts. The pulley profile is the result of the years of research and continous development and is patented to ensure correct usage. Entire range of iming pulleys such as in classical range MXL,XL,L,XH and XXH in case & HTD-3 mm,5 mm ,8 mm,14 mm and 20 mm& 1/9 involute.,2.875 HTD & 9.525 mm.(3/8)HTD. These pulleys are manufactured by us with the highest degree of accuracy and standard tolerance . Wide range of material can be used such as steel ,aluminium,special plasticto various graded casting and we have already manufactured pulleys from 6 mm to 960 mm diameter and above.

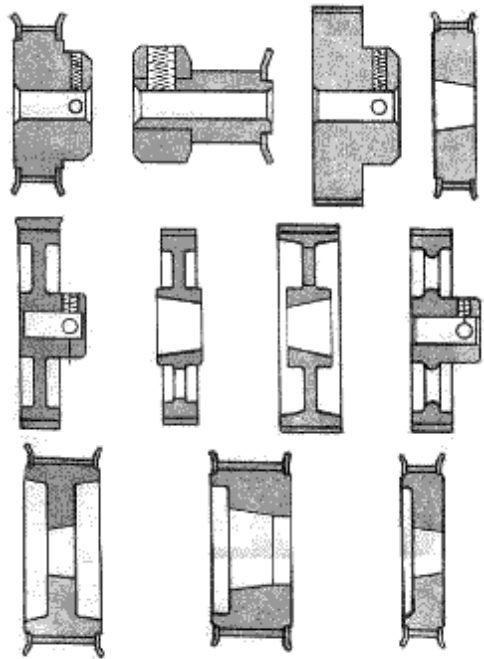

SPECIFICATION

TYPE	TOOTH PITCH
'INVOLUTE '-SERIES	
MXL	(2.032 mm)0.080"
L	(5.080 m.m)0.200"
H	(9.525 m.m)0.375"
XH	(12.700 m.m)0.875"
XXH	(22.225 m.m)0.875" (31.750 m.m)1.2250"
T-SERIES	
T-2.5	(2.500 m.m)0.098"
T-5.0	(5.00 m.m)0.197"
T-10	(10.000 m.m)0.394"
T-20	(20.000 .m.m)0.787"
'HTD'-SERIES	
3-M	(3.000 m.m)0.120"
5-M	(5.000 .m)0.197"
8-M	(8.000 m.m)0.315"
14-M	(14.000 m.m)0.551"
20-M	(20.000 m.m)0.787"
SPECIAL -UPE PITCHES	
1/9"	INVOLUTE
2.875M	HTD
9.525 M	(0.375"0HTD

11,VASTA HOUSE,GR.FLOOR,JANMABOOMI MARG,
FORT ,MUMBAI -400001 ,INDIA.

TEL:91-22-22844307/22871995/22872449

FAX:91-22-22873597/22870770

E-mail:info@wiperdrive.com,WEB SITE:www.wiperdrive.com