





Variable Speed Drive

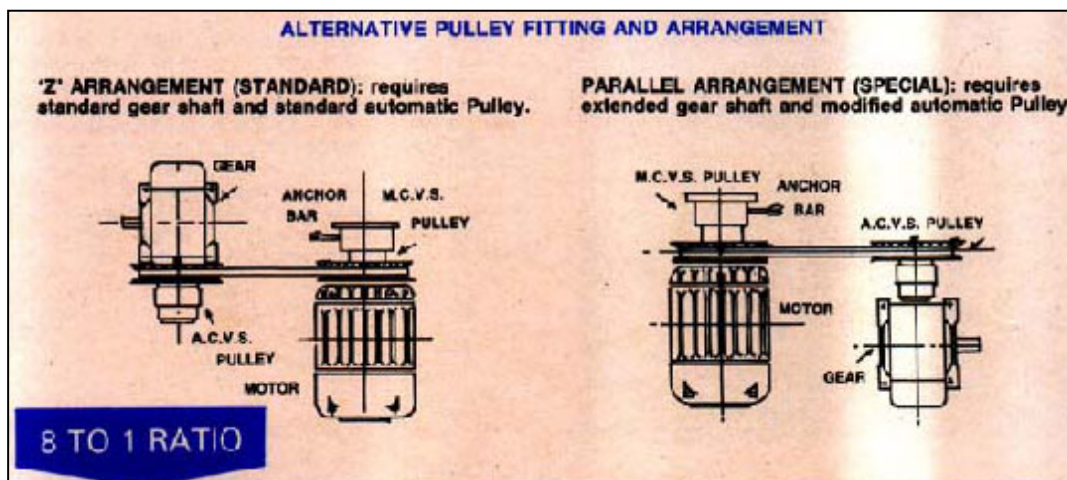

Size Ref.No. of V/S Pulley	Driven Shaft speed		Driving Shaft speed	Horse Power at		V-Rope section inches	Max Bore of Both Pulley ins.	INSIDE CIRCUMFERENCE OF V-ROPE IN INCHES						
	Min.	Max.		Min.speed	Max.speed			30	38	45	56	81	89	90
1030	250	2000	725	1/2	11/4	7/9 x5/16	3/4	10	14	17 1/2	-	29	-	-
1130	250	2000	725	1	3	11/16 x11/32	1	-	12	15 1/2	21	27	33 1/2	38
1230	250	2000	725	1 1/2	4 1/2	11/4 x11/32	1 1/4	-	-	14	19 1/2	25 1/2	32	36 1/2
1330	250	2000	725	2	6	1 1/2 x 7/6	1 1/2	-	-	-	17 1/2	22	30	34 1/2
1430	250	2000	725	3	8	1 1/16 x15/37	1 3/4	-	-	-	-	29	28 1/2	33
1030	340	2720	960	1/2	13/4	7/8 x2/16	3/4	10	14	17 1/2	-	27	-	-
1130	340	2720	960	1 1/2	4	1 1/16 x11/32	1	-	12	15 1/2	-21	25	33 1/2	38
1230	340	2720	960	2	6	1 1/4 x11/32	1 1/4	-	-	14	19 1/2	1 1/2	32	36 1/2
1030	500	4000	1430	3/4	2 1/4	7/8 x5/16	3/4	0	0	17 1/2	-	29	-	-

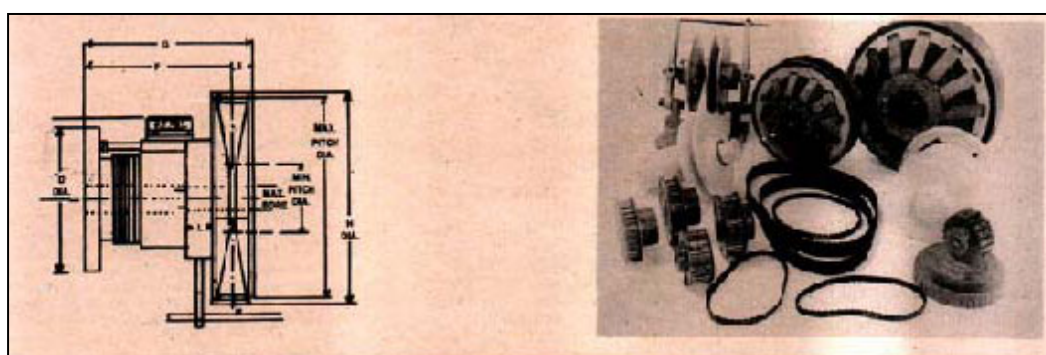

Ref.No.	Max. Bore	Size V-Rope	Pitch Dias of V/S Pulley		Dimensions in inches							
			Min.	Max.	D	E	F	G	H	K	L	
1030	3/4	7/8 x5/16	1 3/4	5 1/4	5 9/16	9/16	4 1/4	5 7/16	5	3 1/4	2	
1130	1	1 1/16 x1 1/32	2 1/8	7 1/8	7 1/16	11/16	5 1/16	5 1/8	6 1/4	3 9/16	2 5/8	
1230	1 1/4	1 1/4 x11/32	2 7/8	8 5/8	8 5/8	11/16	6 1/2	7 1/16	7	4	3 1/6	
1330	1 1/2	1 1/2 x1/16	3 1/2	10 1/2	10 1/2	1	6 11/16	7 11/16	9	4 1/2	4	
1430	1 3/4	1 11/16 x 18/32	4	12	12	1 1/16	7 7/8	8 11/16	9	4 1/8	4 5/8	

