




VERTICAL COUPLING

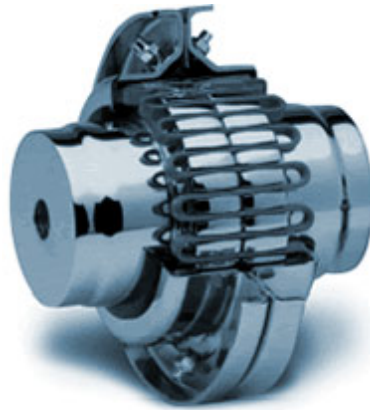

VERTICAL COUPLING

CPLG. SIZE	COUPLING RATING Nm	MAX rpm	MIN BORE mM	MAX BORE mm	CPLG.WT. KG	MRKGM	DIMENSIONS INmm								
							A	B	C	D	F	H	J	M	GAP
2020	48	6000	13	27	1.5	0.0011	111	98	47.5	39.7	68	9.5	24.4	48	3.2
2030	136	6000	13	35	2.2	0.0016	121	98	47.5	49.2	72	9.5	25.2	48	3.2
2040	226	6000	13	44	3.0	0.0027	129	105	50.8	57.2	80	9.5	25.0	51	3.2
2050	395	6000	13	51	5.0	0.0063	148	124	60.3	66.7	97	13.0	31.4	51	3.2
2060	621	6000	19	57	6.7	0.010	162	130	63.5	76.2	110	13.0	32.2	54	3.2
2070	904	5500	19	68	9.7	0.016	173	156	76.2	87.3	121	13.0	33.8	57	3.2
2080	1864	4750	25	83	16.6	0.039	200	181	88.9	104.8	149	13.0	44.1	89	3.2
2090	3390	4000	25	95	23.6	0.072	232	200	98.4	123.8	168	13.0	47.3	95	3.2
2100	5705	3250	42	108	39.5	0.172	267	246	120.6	142.1	198	16.0	60.2	121	4.8
2110	8474	3000	42	117	51.9	0.261	286	259	127.0	160.4	216	16.0	63.3	124	4.8
2120	12428	2700	60	137	75.8	0.500	319	305	149.2	179.4	246	16.0	73.8	143	6.4
2130	18078	2400	66	165	115.0	1.080	378	330	161.9	217.5	284	22.0	75.4	147	6.4
2140	25987	2200	66	184	175.0	1.895	416	375	184.1	254.0	322	22.0	78.5	156	6.4

- COUPLING WEIGHT AND MR² WITH NO BORE.
- MAX.BORES STATED ABOVE USE RECTANGULAR PARALLEL KEYWAYS TO BS 4235 pt. 11972 or DIN 6885 sht 11968.

**11,VASTA HOUSE,GR.FLOOR,JANMABOOMI MARG,
FORT ,MUMBAI -400001 ,INDIA.**

TEL:91-22-22844307/22871995/22872449

FAX:91-22-22873597/22870770

E-mail:info@wiperdrive.com,WEB SITE:www.wiperdrive.com