




Flexible Belt Conveyor

This conveyor is widely used in ports, docks, stations, warehouses and mine industry. It can reduce manual work and improve the efficiency, shorten the load and unload time to reduce the damage of the goods.



Parameter List

	FQX-F		FSE-F		
Belt Width W			407 560 712		
	Folded length L1	Extended length L2	Height Width h J		Conveyor Motor Power KW
Two sections	3D0D	4500	780	W+235	Eiteidng Voter Fewer KW
	3600	5600			
	4100	6600			
	4700	7700			
	5200	8700			
Three sections	6000	10200	800	W+351	
	3800	7800			
	4400	9400			
	5000	11000			
	5600	12600			
Four sections	6200	14200	970	W+467	
	4000	10000			
	4500	11700			
	4900	13000			
	5300	14300			
Loading Capacity (kg/m)	Max60				
Adjusted angle θ	<10 °				
Direction	Single or double				

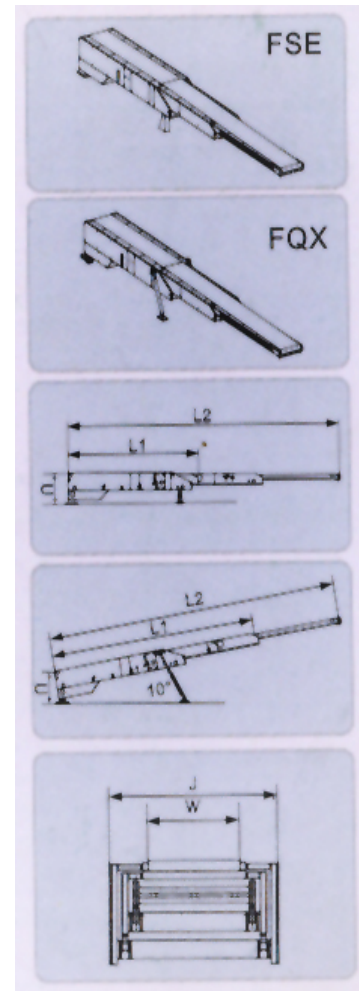

11, VASTA HOUSE, GR. FLOOR, JANMABOOMI MARG,
FORT, MUMBAI - 400001, INDIA.

TEL: 91-22-22844307/22871995/22872449

FAX: 91-22-22873597/22870770

E-mail: info@wiperdrive.com, WEB SITE: www.wiperdrive.com