




NB/NBF TYPE CLUTCHES

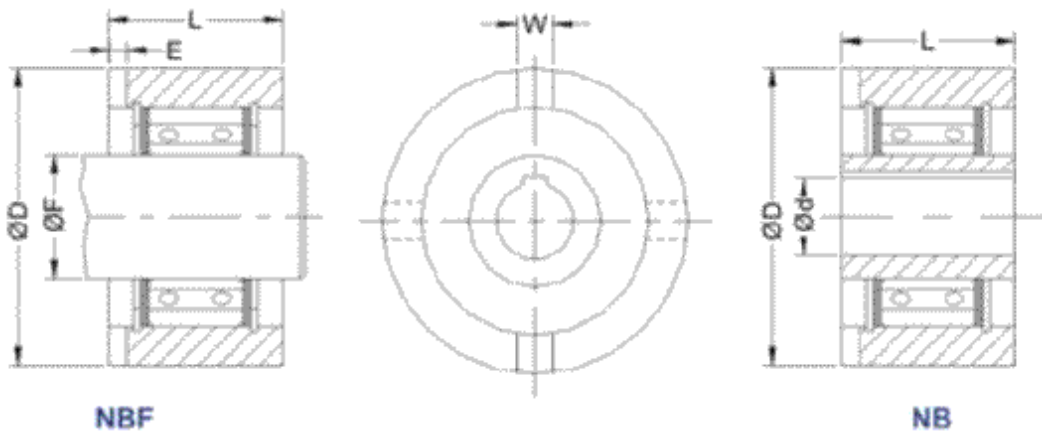

NBF

NB

-OIL /GREASED FILLED,READY TO FIT.

-TRANSMIT TORQUE (POWER) in one directions, opposite free.

-Contains individually spring loaded rollers ,ball bearing support.

Function:-Feeding.

-Indexing

-Back stopping

-Overrunning

CODENO.	DH7		F	D	L	E	W	TORQUE NM
	OVER	UPTO						
NB16 /NBF	12	16	35	55	37	4	8	72
NB25 /NBF	17	25	45	80	40	5	9	190
NB35 /NBF	25	35	55	100	45	6	14	340
NB45 /NBF	35	45	70	115	45	7	16	520
NB60 /NBF	45	60	85	130	45	7	18	720

All dimensions are in m.m

Other sizes on request.

Dimensions/Design subject to modifications.

Shaft must be hardened & ground if selected NBF

Shaft dia is to be controlled within h6/ j6.

11,VASTA HOUSE,GR.FLOOR,JANMABOOMI MARG,
FORT ,MUMBAI-400001 ,INDIA.

TEL:91-22-22844307/22871995/22872449

FAX:91-22-22873597/22870770

E-mail:info@wiperdrive.com,WEB SITE:www.wiperdrive.com