




EPT-20-13M
EPT-20-30M

- "creep" switch option
- Easy entry forks, single or double load wheel option
- Maintenance free battery
- Very small turning radius, especial for very narrow aisle and inside closed trailers
- Easy charging plug(option)

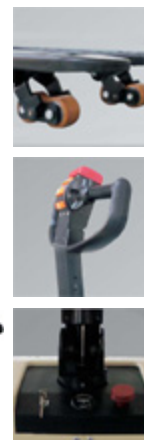

Model			EPT-20-13		
Characteristics	1	Capacity	kg	540	685
	2	Load Center	mm	1300	
	3	Power Device		600	
	4	Operator type		Battery	
	5	Wheel(Drive/Load)		Walkie	
	6	Wheel quantity		Polyurothane/Polyurothane	
Specification	7	Maximum speed	km/h	1D+4L/1D+2L	
	8	Maximum lifting speed	m/s	4.6	5.9
	9	Maximum Lowering speed	m/s	0.056	0.06
	10	Gradeability	%	0.057	0.059
Dimensions	11	Lifting Height	mm	5	7
	12	Ground clearance+fork thivkness	mm	120	
	13	Raised height	mm	74/85	
	14	Height from ground to instrument face	mm	194/205	
	15	Fork thivkness	mm	690	
				44	
	16	Overall length	mm	1570	1620
	17	Fork lenth	mm	1150	1200
	18	Body length	mm	420	
	19	Overall width	mm	704	
	20	Overall fork width	mm	540	685
	21	Size of load wheel	mm	Ø73*98(single wheel) Ø80*58(single wheel)	
	22	Size of steering wheel	mm	Ø252*63	
	23	Min.outside turning radius	mm	1384*1434	
24	Fork width	mm	160		
25	Aisle width(800* 1200mm pallet):horixonal/vertical Aata/Ast3	mm	1540	1720	
26	Aisle width(1000* 1200mm pallet):horixonal/vertical Aata/Ast3	mm	1720	1720	
Driving system	27	Bsttery type		Maintainance Free	
	28	Voltage/Capacity	v/Ah	24/60	
	29	Driving Motor	kw	0.6	
	30	Lifting Motor	kw	0.8	
	31	Control System		Curtis Mos	
	32	Traveling brake		Regenerateel	
	33	Parking brake		Electric	

11,VASTA HOUSE,GR.FLOOR,JANMABOOMI MARG,
FORT ,MUMBAI -400001 ,INDIA.

TEL:91-22-22844307/22871995/22872449

FAX:91-22-22873597/22870770

E-mail:info@wiperdrive.com,WEB SITE:www.wiperdrive.com