


## POWER TRANSMISSION CHAIN - AMERICAN STANDARD

POWER TRANSMISSION CHAIN-PRECISION ROLLER CHAIN TO ISO 606/DIN 8188/ANSI B2.9IM STANDARDS

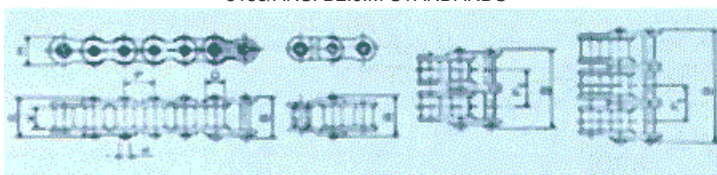

Chain No	NO OF STR. ANDS	ISO. DIN/B. S NO	ANSINO	PITCH (P)	WIDTH BETINNE R PLATE (W) MIN	ROLLER DIA(D) MAX	PLATE DEPTH (H) MAX	PLATE THICKNESS	PINDIA (d) MAX	B PIN DIA (AN) MAX	C PIN LENGTH (B) MAX	TRANS-VERSE PITCH (P1)	AVERAGE -AGEWT (KG/M)	TENSILE STRENGTH (KG)	
BCGA	01		35	0.626	4.68	5.08	8.26	IP	OP	350	14.00	27.20	10.13	0.32	800
	02		35-2					1.25	1.25		24.20	27.20		0.64	1.600
	03		35-3								34.30	37.50		0.90	2.400
DCGA	01	CBA-1	40	12.70	7.85	7.02	12.07	1.50	1.50	307	17.40	21.30	14.33	0.67	1.440
	02	CBA-2	40-2								3.00	34.50		1.32	2.880
	03	CBA-3	40-3								45.30	40.20		1.08	4.320
DCGD	01		41	12.70	6.25	7.77	D.58			350	15.50	18.70		0.42	910
D102	01	10A-1	50	15.875	9.40	10.10	15.09	1.25	1.25	5.00	20.20	24.30	18.11	1.06	2.270
	02	10A-2	50-2					2.00	2.00		30.50	42.00		2.00	4.540
	03	10A-3	50-3								50.00	00.90		0.07	6.810
D 121	01	12A-1	60	19.05	12.50	11.91	10.00	2.39	2.39	6.90	20.90	01.50	22.73	1.57	3.240
	02	12A-2	60-2								49.70	54.00		0.12	6.400
	03	12A-3	60-3								72.00	77.20		4.67+	9.720
D161	01	16A-1	40	25.40	15.70	15.37	24.13	3.15	5.05	794	62.00	38.90	29.29	520	5.740
	02	16A-2	40-2								91.90	45.10		771	11.560
	03	16A-3	40-3								41.10	97.30		401	17.340
D201	01	20A-1	100	31.75	15.90	19.05	30.15	4.00	4.0	954	77.00	83.10	35.75	7.93	18.060
	02	20A-2	100-2								113.00	119.10		11.86	27.090
	03	20A-3	100-3								50.80	57.40		5.74	12.950
D 241	01	24A-1	120	38.10	25.23	22.22	36.20	4.70	4.70	11.11	96.30	102.90	45.44	11.37	25.900
	02	24A-2	120-2								141.70	143.30		17.01	38.850
	03	24A-3	120-3								54.90	62.30		7.66	17.850
D 281	01	28A-1	140	44.45	25.23	25.40	42.24	5.54	5.55	12.71	103.00	132.10	48.87	15.15	46.240
	02	28A-2	140-2								162.40	150.80		22.04	50.360
	03	28A-3	140-3								65.50	90.50		9.84	36.070
D321	01	32A-1	160	60.80	31.55	28.57	48.25	6.30	6.30	14.20	124.20	162.10	58.55	10.53	72.140
	02	32A-2	160-2								182.00	23.70		20.22	1.00,210
	03	40A-1	160-3								80.30	106.00		16.88	50.050
D401	01	40A-2	200	63.50	37.85	39.67	60.3	7.00	7.00	19.85	151.00	190.90	71.55	32.33	1,00,100
	02	40A-3	200-2								223.50	201.00		40.41	
	03	40A-1	200-3								95.50			23.09	
D431	01	40A-2	240	76.20	47.00	47.62	72.00	0.00	0.00	23.01	103.40		87.00	45.05	1,59,150
	02	40A-3	240-2								271.30			00.57	
	03		240-3												

11, VASTA HOUSE, GR. FLOOR, JANMABOOMI MARG,  
FORT, MUMBAI-400001, INDIA.

TEL: 91-22-22844307/22871995/22872449

FAX: 91-22-22873597/22870770

E-mail: [info@wiperdrive.com](mailto:info@wiperdrive.com), WEB SITE: [www.wiperdrive.com](http://www.wiperdrive.com)