




NT TYPE CLUTHES

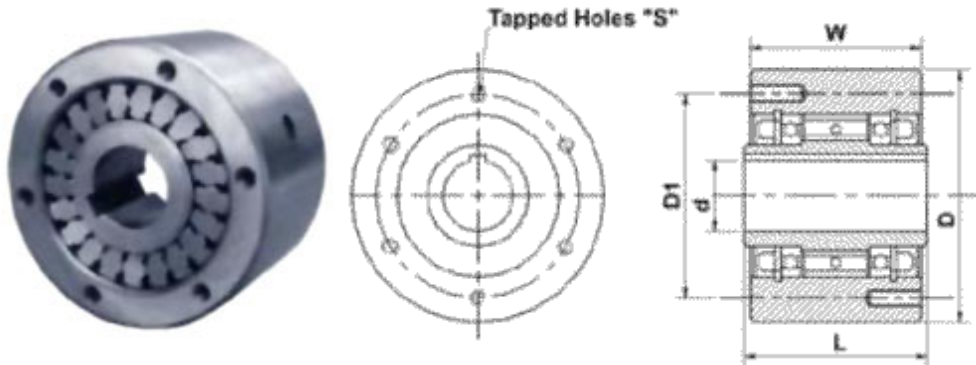

-OIL /GREASED FILLED,READY TO FIT.

-TRANSMIT TORQUE (POWER) in one directions, opposite free.

-Contains individually spring loaded rollers ,ball bearing support.

Function:-Feeding.

-Indexing

-Back stopping

-Overrunning

CODENO.	DH7		D	L	W	D1	CAP SCREW		TORQUE NM
	OVER	UPTO					QTY	MS	
NT0120085	14	20	85	55	53	70	4	M6	200
NT0125095	20	25	95	60	58	80	4	M6	320
NT0130105	25	30	105	65	63	90	6	M6	600
NT0135120	30	35	120	65	63	102	6	M8	1050
NT0142125	35	42	125	75	73	108	6	M8	1250
NT0145135	40	45	135	75	73	115	6	M10	1600
NT0150145	45	50	145	80	78	125	6	M10	2000
NT0155160	50	55	160	86	83	138	6	M10	2300
NT0160170	55	60	170	86	83	145	8	M10	2500
NT0165185	60	65	185	100	97	165	8	M10	4100
NT0175200	65	75	200	120	117	180	8	M12	5000

All dimensions are in m.m

Other sizes on request.

Dimensions/Design subject to modifications.

Can be supplied with mounting flange

Shaft dia is to be controlled within h6/
j6.

11,VASTA HOUSE,GR.FLOOR,JANMABOOMI MARG,
FORT ,MUMBAI -400001 ,INDIA.

TEL:91-22-22844307/22871995/22872449

FAX:91-22-22873597/22870770

E-mail:info@wiperdrive.com,WEB SITE:www.wiperdrive.com