


B GROOVE PULLEY

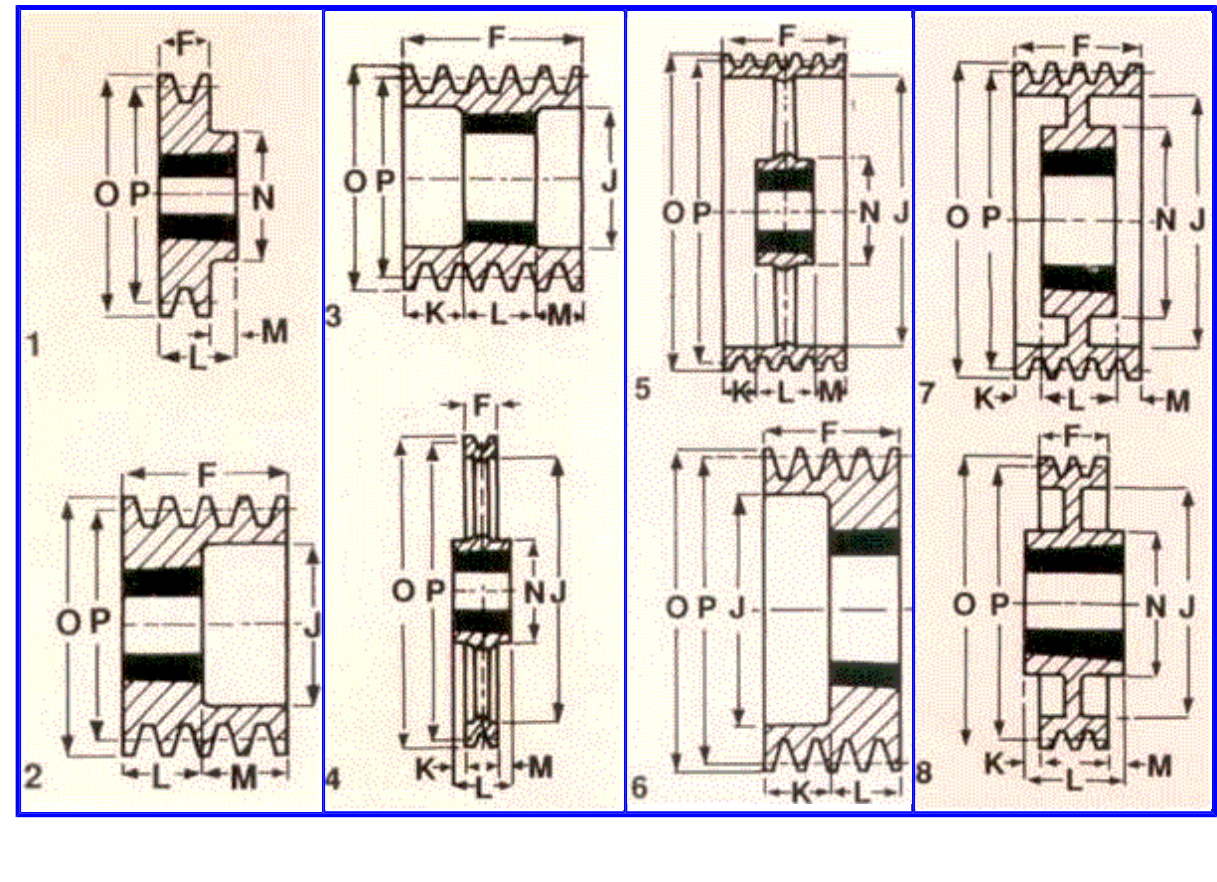

FOR USE WITH B/SPB BELTS

PRODUCT CODE	PITCH DIA(P)	NO.OF GROOVES	BUSH NO.	MAX. BORE MET. IMP.	PULLEY TYPE	F	J	K	L	M	N	OUTSIDE DIA(O)
002B0125	125	2	1610	42	1	6	44	85	19	25	0	132
3B0125		3	1610	42	1	6	63	85	38	25	0	
4B0125		4	2012	50	2	3	82	89	25	32	2.5	
5B0125		5	2012	50	2	3	101	89	34.5	32	34.5	
6B0125		6	2012	50	2	3	120	89	44	32	44	
002B0232		132	2	1610	43	1	6	44	92	19	25	
3B0132	3		1610	43	1	6	63	92	38	25	0	
4B0132	4		2012	50	2	3	82	92	25	32	25	
5B0132	5		2012	50	2	3	101	92	-	32	69	
6B0132	6		2012	50	2	3	120	92	44	32	44	
002B0140	140		2	1610	42	1	6	44	100	19	25	0
3B0140		3	1610	42	1	6	63	100	38	32	0	
4B0140		4	2012	50	2	3	82	100	25	32	25	
5B0140		5	2012	50	2	2	101	100	-	45	69	
6B0140		6	2012	60	2	3	120	109	37.5	25	37.5	
002B0150		150	2	1610	42	1	6	44	110	19	32	0
3B0150	3		2012	50	2	6	63	110	31	32	0	
4B0150	4		2012	50	2	3	82	110	25	45	25	
5B0150	5		2517	60	2	2	101	110	-	45	56	
6B0150	6		2517	60	2	2	120	110	-	75	-	

FOR USE WITH B/SPB BELTS

PRODUCTS CODE	PITCH DIA(P)	NO.OF GROOVES	BUSH NO.	MAX.BORE MET. IMP.	PULLEY TYPE	F	J	K	L	M	N	OUTSIDE DIA(O)
002B0160	160	2	2012	50	2"	6	44	114	12	32	0	167
3B0160		3	2517	60	2"	6	63	114	18	45	0	
4B0160		4	2517	60	2"	3	82	114	18.5	45	18.5	
5B0160		5	2517	60	2"	3	101	114	28	45	28	
6B0150		6	2517	60	2"	2	120	114	-	45	75	
002B0170		170	2	2012	50	2"	6	44	124	12	32	
3B0170	3		2517	60	2"	6	63	124	18	45	0	
4B0170	4		2517	60	2"	3	82	124	18.5	45	18.5	
5B0170	5		3020	75	3"	3	101	128	25	51	25	
6B0170	6		3020	75	3"	2	120	128	-	51	69	
002B0180	180		2	2012	50	2"	6	44	134	12	32	0
3B0180		3	2517	60	2"	6	63	134	18	45	0	
4B0180		4	2517	60	2"	3	82	134	18.5	45	18.5	
5B0180		5	3020	75	3"	3	101	134	25	51	25	
6B0180		6	3020	75	3"	2	120	134	-	51	69	
002B0190		190	2	2517	60	2"	1	44	-	-	44	0
3B0190	3		2517	60	2"	6	63	144	18	45	18	
4B0190	4		2517	60	2"	3	82	144	18.5	45	31	
5B0190	5		3020	75	3"	3	101	144	25	51	50	
6B0190	6		3020	75	3"	2	120	144	-	51	69	
002B0200	200		2	2517	60	2"	1	44	-	-	44	0
3B0200		3	2517	60	2"	2	63	154	-	45	18	
4B0200		4	3020	75	3"	2	82	154	-	51	31	
5B0200		5	3020	75	3"	2	101	154	-	51	50	
6B0200		6	3020	75	3"	2	120	154	-	51	69	
002B0212		112	2	2517	60	2"	1	44	-	-	44	0
3B0212	3		2517	60	2"	2	63	166	-	45	-	
4B0212	4		3020	75	3"	2	82	166	-	51	-	
5B0212	5		3020	75	3"	2	101	166	-	51	-	
6B0212	6		3020	75	3"	2	120	166	-	51	-	

FOR USE WITH B/SPB BELTS

PRODUCTS CODE	PITCH DIA (P)	NO.OF GROOVES	BUSH NO.	MAX.BORE MET. IMP.	PULLEY TYPE	F	J	K	L	M	N	OUTSIDE DIA (O)	
022B0224	224	2	2517	60	2	1	44	-	-	44	0	231	
3B0224		3	2517	60	2	2	63	178	-	45	18		
4B0227		4	3020	75	3	2	82	178	-	51	31		
5B0224		5	3020	75	3	2	101	178	-	51	50		
6B0224		6	3020	75	3	2	120	178	-	51	69		
022B0236		236	2	2517	60	2	1	44	-	-	44		0
3B0236	3		2517	60	2	2	63	190	-	45	18		
4B0236	4		3020	75	3	2	82	190	-	51	31		
5B0236	5		3020	75	3	2	101	190	-	51	50		
6B0236	6		3020	75	3	2	120	190	-	51	69		
002B0250	250		2	2517	60	2	8	44	-	-	44	0	257
3B0350		3	3020	75	3	2	63	204	-	51	12		
4B0250		4	3020	75	3	2	82	204	-	51	31		
5B0250		5	3020	75	3	2	101	204	-	51	50		
6B0250		6	3020	75	3	2	120	204	-	51	69		
002B0280		280	2	2517	60	2	8	44	234	0.5	45	0.5	
3B0280	3		3020	75	3	7	63	234	6	51	6	159	
4B0280	4		30203	75	3	7	82	234	15.5	51	15.5	159	
5B0280	5		3535	90	3	7	101	234	6	89	6	178	
6B0280	6		3535	90	3	7	120	234	15.5	89	15.5	178	
002B0315	315		2	2517	60	2	7	44	269	0.5	45	0.5	124
3B0315		3	3020	75	3	8	63	269	6	51	6	159	
4B0315		4	3535	90	3	7	82	269	3.5	89	3.5	178	
5B0315		5	3535	90	3	8	101	269	6	89	6	178	
6B0315		6	3535	90	3	7	120	269	15.5	89	15.5	178	
002B0355		355	2	3020	75	3	7	44	309	3.5	51	3.5	159
3B0355	3		3020	75	3	4	63	309	6	51	6	159	
4B0355	4		3535	90	3	5	82	309	3.5	89	3.5	178	
5B0355	5		3535	90	3	8	101	309	6	89	6	178	
6B0355	6		3535	90	3	7	120	309	15.5	89	15.5	178	
002B0400	400		2	3020	75	3	7	44	354	3.5	51	3.5	159
3B0400		3	3535	90	3	4	63	354	13	89	13	178	
4B0400		4	3535	90	3	4	82	354	3.5	89	3.5	178	
5B0400		5	3535	90	3	4	101	354	6	89	6	178	
6B0400		6	3535	90	3	5	120	354	15.5	89	15.5	178	
002B0500		500	2	3020	75	3	5	44	454	3.5	51	3.5	159
3B0500	3		3535	90	3	4	63	454	13	89	13	178	
4B0500	4		3535	90	3	4	82	454	3.5	89	3.5	178	
5B0500	5		3535	90	3	4	101	454	6	89	6	178	
6B0500	6		4040	100	3	5	120	454	9	102	9	216	
002B0630	630		2	3030	75	4	5	44	584	16	76	16	159
3B0630		3	3535	90	3	4	63	584	13	89	13	178	
4B0630		4	3535	90	3	4	82	584	3.5	89	3.5	178	
5B0630		5	4040	100	3	4	101	584	0.5	102	0.5	216	
6B0630		6	4040	100	4	4	120	584	9	102	9	216	
002B0800		800	2	3030	75	4	5	44	754	16	76	16	159
3B0800	3		3535	90	3	4	63	754	13	89	13	178	
4B0800	4		4040	100	3	4	82	754	10	102	10	216	
5B0800	5		4040	100	4	4	101	754	0.5	102	0.5	216	
6B0800	6		4545	110	4	4	120	754	3	114	3	242	
003B1000	1000		3	4040	100	4	5	63	954	19.5	102	19.5	216
4B1000		4	4040	100	4	4	82	954	10	102	10	216	
5B1000		5	4545	110	4	4	101	954	6.5	114	6.5	242	
6B1000		6	4545	110	4	4	120	954	3	114	3	242	

11, VASTA HOUSE, GR. FLOOR, JANMABOOMI MARG, FORT, MUMBAI-400001, INDIA.

TEL: 91-22-22844307/22871995/22872449

FAX: 91-22-22873597/22870770

E-mail: info@wiperdrive.com, WEB SITE: www.wiperdrive.com