




CROACH CONTACT SILENT CHAIN

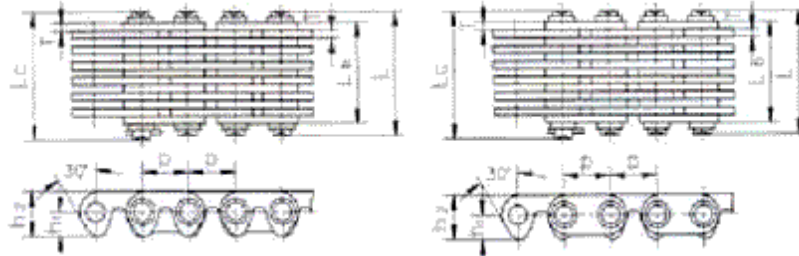

WIPER CHAIN NO.	PITCH	CHAIN WIDTH	PIN DIAMETER	PIN LENGTH		DISTANCE FROM HOLE CENTRE TO TOOTH		PLATE DEPTH	PLATE THICKNESS	GUIDE FROM	NUMBER OF PLATES	ULTIMATE TENSILE STRENGTH	AVERAGE TENSILE STRENGTH	WEIGHT PER METER
	P mm	d2 max mm	d2 max mm	L max mm	Lc max mm	h1 max mm	h2 max mm	T max mm		n	Q0 kN	Q0 kN	q kg/M	
C4-120	12.7	19.5	5.08	24.5	26.0	6.625	12.1	1.5	(INSIDE)	13	20.0	22.2	1.20	
C4-123		22.5		27.5	29.0				(INSIDE)	15	23.0	25.5	1.37	
C4-129		28.5		33.5	35.0				(INSIDE)	19	28.5	31.6	1.72	
C4-132		31.5		36.5	38.0				(INSIDE)	21	31.0	34.9	1.89	
C4-138		37.5		42.5	44.0				(INSIDE)	25	38.0	42.1	2.22	
C4-150		49.5		54.5	56.0				(INSIDE)	33	50.0	55.5	2.90	
C4-320		19.5		24.5	26.0				(OUTSIDE)	13	20.0	22.2	1.21	
C4-323		22.5		27.5	29.0				(OUTSIDE)	15	23.0	25.5	1.38	
C4-329		28.5		33.5	35.0				(OUTSIDE)	19	28.5	31.6	1.73	
C4-332		31.5		36.5	38.0				(OUTSIDE)	21	31.0	34.9	1.90	
C4-338		37.5		42.5	44.0				(OUTSIDE)	25	38.0	42.1	2.23	

11, VASTA HOUSE, GR. FLOOR, JANMABOOMI MARG,
FORT, MUMBAI-400001, INDIA.

TEL: 91-22-22844307/22871995/22872449

FAX: 91-22-22873597/22870770

E-mail: info@wiperdrive.com, WEB SITE: www.wiperdrive.com