


DC_TYPE_DOUBLE_CAGE_FREEWHEEL

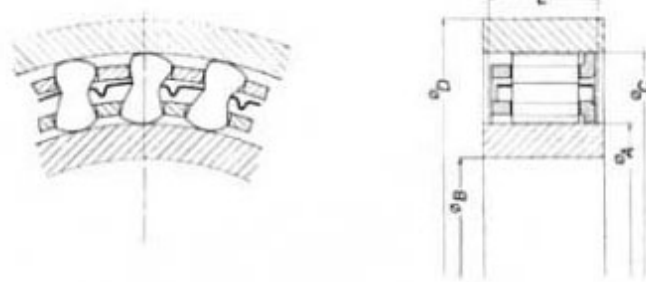

TYPE	A mm	Cmm	SPRAG SPACE mm	E mm	Dmm	Bmm	NO.OF SPRAG	TORQUE NM
DC-2222G	22,225	38,885	8,330 ±0.075	10.0	49.8	17.30	12	74
DC-2534G	25,340	42,000	8,330 ±0.075	10.0	525.8	20.20	12	80
DC-2776	2,7762	44,422	8,330 ±0.075	13.5	57.2	21.60	14	139
DC-3034	30,340	47,000	8,330 ±0.075	13.5	61.4	23.50	14	154
DC-3175	31,750	48,410	8,330 ±0.075	13.5	62.5	24.60	16	189
DC-3175A	31,750	48,410	8,330 ±0.075	16.0	62.5	24.60	16	240
DC-3492	34,920	51,580	8,330 ±0.075	13.5	65.5	27.60	16	170
DC-3809A	38,092	54,752	8,330 ±0.075	13.5	70.4	29.70	18	324
DC-3834	38,340	55,000	8,330 ±0.075	10.0	70.4	29.70	18	251
DC-4127	41,275	57,395	8,330 ±0.075	16.0	74.2	32.00	18	265
DC-4445G	44,450	61,110	8,330 ±0.075	13.5	78.7	34.50	18	183
DC-4445A	44,450	61,110	8,330 ±0.075	16.0	78.7	34.50	20	424
DC-4972	49,721	66,381	8,330 ±0.075	13.5	85.4	38.80	22	366
DC-5080A	50,800	67,460	8,330 ±0.075	13.5	86.4	39.60	22	440
DC-5134	51,340	68,000	8,330 ±0.075	16.0	87.1	40.10	22	375
DC-5476	54,765	71,425	8,330 ±0.075	21.0	91.7	42.60	24	480
DC-5476A	54,765	71,425	8,330 ±0.075	25.4	91.7	42.60	24	618
DC-5476B	54,765	71,425	8,330 ±0.075	16.0	91.7	42.60	24	907
DC-5476C	54,765	71,425	8,330 ±0.075	16.0	91.7	42.60	24	1165
DC-5715A	57,150	73,810	8,330 ±0.075	16.0	97.2	44.20	24	620
DC-5776A	57,760	74,420	8,330 ±0.075	25.4	97.7	44.90	26	711
DC-5834A	58,340	75,000	8,330 ±0.075	21.0	99.5	45.50	26	715
DC-5834C	58,340	75,000	8,330 ±0.075	13.5	99.5	45.50	26	1360
DC-6191B	61,910	78,580	8,330 ±0.075	21.0	101.1	48.50	26	1118
DC-6334	63,340	80,000	8,330 ±0.075	16.0	103.4	49.90	26	510
DC-6334B	63,340	80,000	8,330 ±0.075	16.0	103.4	49.90	26	950
DC-6350A	63,500	80,160	8,330 ±0.075	21.0	103.6	50.10	26	720
DC-6834A	68,340	85,000	8,330 ±0.075	16.0	108.5	52.50	26	776
DC-6834B	68,340	85,000	8,330 ±0.075	13.5	108.5	52.50	26	1250
DC-6985A	69,850	86510	8,330 ±0.075	16.0	110.9	52.80	26	820
DC-7221	72,217	88,877	8,330 ±0.075	21.0	114.3	56.10	30	794
DC-7221A	72,217	88,877	8,330 ±0.075	21.0	114.3	56.10	30	1023
DC-7221B	72,217	88,877	8,330 ±0.075	16.0	114.3	56.10	30	1504
DC-7334B	73,340	90,000	8,330 ±0.075	21.0	117.2	57.10	30	1550
DC-7620A	76,200	92,860	8,330 ±0.075	13.5	121.5	59.20	30	1100
DC-7834B	78,340	95,000	8,330 ±0.075	25.4	123.3	60.50	30	1640
DC-7969	79,698	96,358	8,330 ±0.075	25.4	123.9	61.90	34	981
DC-7969C	79,698	96,358	8,330 ±0.075	16.0	123.9	61.90	34	2396
DC-8260C	82,600	99,260	8,330 ±0.075	25.4	130.5	64.40	34	2850
DC-8334A	83,340	100,000	8,330 ±0.075	25.4	131.6	64.90	34	1220
DC-8334C	83,340	100,000	8,330 ±0.075	25.4	131.6	64.90	34	2420
DC-8729A	87,290	103,960	8,330 ±0.075	16.0	133.6	67.80	34	1477
DC-9334C	93,340	110,000	8,330 ±0.075	25.4	139.1	69.50	34	2950
DC-9834C	96,340	115,000	8,330 ±0.075	25.4	146.5	73.50	34	3120
DC-10160C	101,600	118,260	8,330 ±0.075	25.4	150.2	76.50	40	3740
DC-10323A	103,231	119,891	8,330 ±0.075	16.0	154.2	80.20	40	1900
DC-10323B	103,231	119,891	8,330 ±0.075	21.0	154.2	80.20	40	3000
DC-10834C	108,340	125,000	8,330 ±0.075	25.4	162.1	84.50	40	4000
DC-11739A	117,391	134,051	8,330 ±0.075	16.0	172.1	90.10	40	2160
DC-12334A	123,340	140,000	8,330 ±0.075	16.0	183.6	96.20	50	2825
DC-12334C	123,340	140,000	8,330 ±0.075	25.4	183.6	96.20	50	5650
			8,330 ±0.075					
			8,330 ±0.075					
			8,330 ±0.075					
			8,330 ±0.075					
			8,330 ±0.075					
			8,330 ±0.075					
			8,330 ±0.075					
			8,330 ±0.075					
			8,330 ±0.075					
			8,330 ±0.075					
			8,330 ±0.075					
			8,330 ±0.075					
			8,330 ±0.075					
			8,330 ±0.075					
			8,330 ±0.075					
			8,330 ±0.075					
			8,330 ±0.075					

**11, VASTA HOUSE, GR.FLOOR, JANMABOOMI MARG,
FORT, MUMBAI-400001, INDIA.**
TEL:91-22-22844307/22871995/22872449
FAX:91-22-22873597/22870770
E-mail:info@wiperdrive.com, WEB SITE:www.wiperdrive.com